


スタブエンド 製作可能範囲

配管用継手製品 スタブエンド

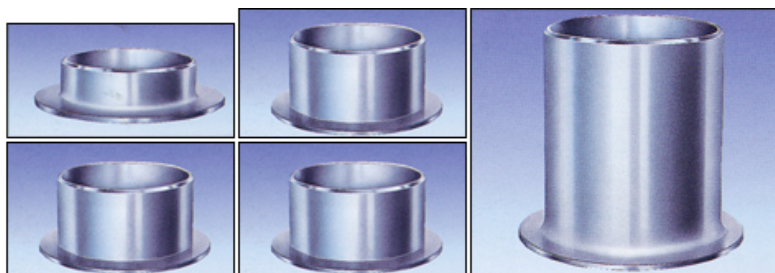

製作可能範囲

スタブエンド (ラップジョイント)

JIS 10 ^K							
		肉 厚					
呼び径 (B)	S5S	S10S	S20S	S40	S80	呼び径 (A)	
1/2						15	
3/4						20	
1						25	
1 1/4						32	
1 1/2						40	
2						50	
2 1/2						65	
3						80	
3 1/2						90	
4						100	
5						125	
6						150	
8						200	
10						250	
12						300	
14						350	
16						400	
18						450	
20						500	
24						600	

JPI							
		肉 厚					
呼び径 (INCH)	S5S	S10S	S20S	S40	S80	呼び径 (MM)	
1/2						15	
3/4						20	
1						25	
1 1/4						32	
1 1/2						40	
2						50	
2 1/2						65	
3						80	
3 1/2						90	
4						100	
5						125	
6						150	
8						200	
10						250	
12						300	
14						350	
16						400	
18						450	
20						500	
24						600	

MSS TYPE A or B									呼び径
肉 厚									呼び径
(INCH)	S5S	S10S	S10	S20	STD	S40	X.S	S80	(MM)
1/2									15
3/4									20
1									25
1 1/4									32
1 1/2									40
2									50
2 1/2									65
3									80
3 1/2									90
4									100
5									125
6									150
8									200
10									250
12									300
14									350
16									400
18									450
20									500
24									600

ASME									呼び径
肉 厚									呼び径
(INCH)	S5S	S10S	S10	S20	STD	S40	X.S	S80	(MM)
1/2									15
3/4									20
1									25
1 1/4									32
1 1/2									40
2									50
2 1/2									65
3									80
3 1/2									90
4									100
5									125
6									150
8									200
10									250
12									300
14									350
16									400
18									450
20									500
24									600

ASME									
呼び径	肉 厚								呼び径
(INCH)	S5S	S10S	S10	S20	STD	S40	X.S	S80	(MM)
1/2									15
3/4									20
1									25
1 1/4									32
1 1/2									40
2									50
2 1/2									65
3									80
3 1/2									90
4									100
5									125
6									150
8									200
10									250
12									300
14									350
16									400
18									450
20									500
24									600

■ ■ 製作可能範囲